

JC685 U.S. PTO
07/28/00

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

ATTORNEYS AT LAW

1100 NEW YORK AVENUE, N.W., SUITE 600

WASHINGTON, D.C. 20005-3934

www.skgf.com

PHONE: (202) 371-2600 FACSIMILE: (202) 371-2540

JC864 U.S. PTO
09/628658
07/28/00

ROBERT GREENE STERNE
EDWARD J. KESSLER
JORGE A. GOLDSTEIN
SAMUEL L. FOX
DAVID K.S. CORNWELL
ROBERT W. ESMOND
TRACY-GENE G. DURKIN
MICHELE A. CIMBALA
MICHAEL B. RAY
ROBERT E. SOKOHL
ERIC K. STEFFE
MICHAEL Q. LEE

STEVEN R. LUDWIG
JOHN M. COVERT*
LINDA E. ALCORN
RAZ E. FLESHNER
ROBERT C. MILLONIG
MICHAEL V. MESSINGER
JUDITH U. KIM
TIMOTHY J. SHEA, JR.
DONALD R. MCPHAIL
PATRICK E. GARRETT
STEPHEN G. WHITESIDE
JEFFREY T. HELVEY*

HEIDI L. KRAUS
JEFFREY R. KURIN
RAYMOND MILLIEN
PATRICK D. O'BRIEN
LAWRENCE B. BUGAISKY
CRYSTAL D. SAYLES*
EDWARD W. YEE
ALBERT L. FERRO*
DONALD R. BANOWIT
PETER A. JACKMAN
MOLLY A. MCCALL
TERESA U. MEDLER

JEFFREY S. WEAVER
KRISTIN K. VIDOVICH
KENDRICK P. PATTERSON
DONALD J. FEATHERSTONE
GRANT E. REED
VINCENT L. CAPUANO
JOHN A. HARROUN*
MATTHEW M. CATLETT*
NATHAN K. KELLEY*
ALBERT J. FASULO II*
W. BRIAN EDGE*

KAREN R. MARKOWICZ**
SUZANNE E. ZISKA**
BRIAN J. DEL BUONO**
ANDREA J. KAMAGE**
NANCY J. LEITH**
TARJA H. NAUKKARINEN**

*BAR OTHER THAN D.C.

**REGISTERED PATENT AGENTS

July 28, 2000

WRITER'S DIRECT NUMBER:

(202) 371-2569

INTERNET ADDRESS:

MRAY@SKGF.COM

Commissioner for Patents
Washington, D.C. 20231

Box Patent Application

Re: U.S. Non-Provisional Utility Patent Application under 37 C.F.R. § 1.53(b)
Appl. No. To be assigned; Filed: Herewith
For: **System and Method for Storing Compressed Data Onto a Storage
Medium**
Inventors: Meier *et al.*
Our Ref: 15-4-1062.00

Sir:

The following documents are forwarded herewith for appropriate action by the U.S.
Patent and Trademark Office:

1. PTO Fee Transmittal (Form PTO/SB/17) (*in duplicate*);
2. PTO Utility Patent Application Transmittal (Form PTO/SB/05);
3. U.S. Utility Patent Application entitled:

System and Method for Storing Compressed Data Onto a Storage Medium

and naming as inventors:

Fabian W. Meier; and
Francis S. Bernard

09628658 "07/28/00

Commissioner for Patents
July 28, 2000
Page 2

the application consisting of:

- a. A specification containing:
 - i. 18 pages of description prior to the claims;
 - ii. 4 pages of claims (19 claims);
 - iii. a one (1) page abstract;
 - b. 9 sheet(s) of drawings: (Figures 1-12); and
 - c. An original executed Declaration;
4. Authorization to Treat a Reply As Incorporating An Extension of Time Under 37 C.F.R. § 1.136(a)(3) (*in duplicate*);
 5. Recordation Form Cover Sheet;
 6. An original executed Assignment to Silicon Graphics, Inc., recordation of which is hereby respectfully requested;
 7. Two (2) return postcards; and
 8. Our check No. 28248 for \$ 886.00 to cover:
 - \$ 690.00 Filing fee for patent application;
 - \$ 40.00 Assignment recordation fees; and
 - \$ 156.00 Fee for excess claims.

In accordance with 37 C.F.R. § 1.821(f), the paper copy of the sequence listing and the computer readable copy of the sequence listing submitted herewith in the above application are the same.

It is respectfully requested that, of the two attached postcards, one be stamped with the filing date of these documents and returned to our courier, and the other, prepaid postcard, be stamped with the filing date and unofficial application number and returned as soon as possible. The U.S. Patent and Trademark Office is hereby authorized to charge any fee deficiency, or credit any overpayment, to our Deposit Account No. 19-0036.

Please type a sign(+) inside this box



PTO/SB/05 (2/98)

Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR § 1.53(b))	Attorney Docket No.	1452.3080000
	First Inventor or Application Identifier	F. W. Meier
	Title	System and Method for Storing Compressed Data Onto Storage Medium
	Express Mail Label No.	

PTO
09/28/00
JC864 W.S. 258



APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification [Total Pages 23] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 2]</p> <p>4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 4] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below] i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein</p> <p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies</p>	
ACCOMPANYING APPLICATION PARTS	
<p>8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>10. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations</p> <p>12. <input type="checkbox"/> Preliminary Amendment</p> <p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (2) (Should be specifically itemized)</p> <p>14. <input type="checkbox"/> *Small Entity Statement(s) (PTO/SB/09-12) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired</p> <p>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>16. <input checked="" type="checkbox"/> Other 37 C.F.R. § 1.136(a)(3) Authorization <input type="checkbox"/> Other:</p> <p><small>*NOTE FOR ITEMS 1 & 14. IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)</small></p>	
<p>17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:</p> <p><input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-Part (CIP) of prior application No: ____/____</p> <p>Prior application information: Examiner _____ Group/Art Unit: _____</p>	

18. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label		<input checked="" type="checkbox"/> Correspondence address below			
NAME	STERNE, KESSLER, GOLDSTEIN & FOX P L L C Attorneys at Law				
ADDRESS	Suite 600, 1100 New York Avenue, N W				
CITY	Washington	STATE	DC	ZIP CODE	20005-3934
COUNTRY	USA	TELEPHONE	(202) 371-2600	FAX	(202) 371-2540

NAME (Print/Type)	Michael B. Ray	Registration No. (Attorney/Agent)	33,997
SIGNATURE		Date	7/28/00

Burden Hour Statement: this form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

System and Method for Storing Compressed Data Onto a Storage Medium

*Inventors: Fabian W. Meier
Francis S. Bernard*

5 *Cross-Reference to Related Applications*

This application is related to commonly owned, co-pending application no. (to be assigned), filed on even data herewith, titled "System and Method for Compressing Data," attorney docket no. 1452.3070000, the full text of which is incorporated herein by reference as if reproduced below.

10 *Background of the Invention*

Field of the Invention

The present invention relates generally to the storage of data and, more particularly, to the compression, recording and playing of video data.

Related Art

15 Compression is the process of encoding an image such that it requires less space for storage. There are two fundamental ways to compress image data: lossy compression and lossless compression. Examples of lossy compression schemes include JPEG and MPEG. Lossy compression can provide a very high compression ratio. However, during the encoding process some data will be
20 irreversibly lost. Consequently, a lossy encoded image will have some degradation of visual quality when expanded. Lempel-Ziv and Welch (LZW) encoding and Rice encoding are two well known lossless compression algorithms. Lossless compression usually results in compression ratios lower than those obtained with

lossy compression. However, the benefit of compressing an image using a lossless compression scheme is that once expanded, the resulting image will be exactly as it was prior to being compressed.

5 Traditionally, with any compression algorithm, the compression ratio is data dependent. Accordingly, the compression ratio cannot be predicted. However, in certain instances, control of the compression ratio is desired. For example, a video cassette recorder (VCR) tape has a constant bandwidth capacity. Likewise, a hard disk array has a maximum data storage capacity; therefore, when recording data onto either storage device, it is highly desirable to control the compression ratio of the data. The importance of this control is even more evident when one considers the recent developments in the area of high definition television (HDTV).

10 As compared with conventional TV, HDTV signals have higher resolution and require more bandwidth for storage. For example, an HDTV image presented in 1080i format with 444 sampling and 8 bit resolution has a bandwidth of 1.5 Gbits/s. Present VCR tapes are unable to meet such storage demands. While recording devices and media (e.g., tapes, ROM cartridges, magnetic or optical disks) capable of recording HDTV images will be developed, compression will still be desirable, if not necessary.

15 A feature of HDTV is the high quality resolution of the images produced. Thus, any compromising of the visual image is not desirable. As already mentioned, lossy compression results in diminished video quality. Likewise, as one considers the bandwidth constraints imposed by storage media, it is evident that the use of a lossless compression scheme can also create problems. Consider the following explanation. The compressed bit streams of image sequences produced by lossless compression schemes often include bandwidth peaks. Bandwidth peaks are the result of producing a number of successive frames with a very low compression ratio. If the storage media, a VCR tape for example, lacked the capacity to store the bandwidth peak portions of the bit stream then the data would be lost. Buffering is used to avoid this scenario. Buffering, however, raises the potential for two additional problems: latency and buffer overflow, both

of which result in lost data and/or diminished visual quality. Therefore, what is needed is a method for compressing data, in particular, high definition television image data, such that the resulting bit stream bandwidth is kept relatively constant and the image quality is not compromised. These results allow the bit streams to be recorded on a storage medium and viewed without diminished visual quality.

Summary of the Invention

The present invention provides a system and method for recording data onto a storage medium such that it can be replayed to provide either a lossy quality or lossless quality presentation. Because there is some loss of visual integrity associated with a lossy presentation, this option is acceptable when the user intends to only preview the image or video sequence. The benefit of presenting a lossless quality presentation is that the decompressed image will be exactly the same as the original uncompressed image.

In order to view either lossy or lossless quality presentations, the compressed data must first be recorded onto a storage medium. Each image of a video sequence is processed by an encoder. The output of the encoder is a fixed length primary bit stream and a variable length supplemental bit stream. The size of the fixed length bit stream is chosen according to the write-bandwidth of the storage medium. As each of the primary bit streams are received, they are recorded directly onto the storage medium in real time. As each of the supplemental bit streams are received, they are written into temporary memory in real time. Once all of the primary bit streams are received and subsequently written onto the storage medium, the supplemental bit streams will be retrieved from the temporary memory and written onto the storage medium. After all of the bit stream data has been written onto the storage medium, a user can be prompted as to the mode of desired playback.

The viewing choices include either lossy quality or lossless quality. If the desired data presentation quality level is lossy then the primary bit stream of the saved compressed data is retrieved from the storage medium. The primary bit

stream includes variable length portions and possibly fixed length portions of encoded data. The primary bit stream is provided to a decoder for decoding. If the desired data presentation quality level is lossless, then the supplemental bit stream will be retrieved first. The supplemental bit stream, which includes fixed length and possibly variable length data, is retrieved from the storage medium and written into temporary memory. Once all of the supplemental bit stream data has been written into temporary memory then both the primary bit stream data and the supplemental bit stream data is input into a decoder for decompression into lossless data.

Thus, the output from the decoder is either a presentation of the original image in lossy quality or lossless quality. The ability to choose the decoding quality makes this scheme a progressive image compression scheme.

The method for image compression (i.e., producing the primary and supplemental bit streams) comprises the steps of dividing the image into a plurality of regions. For each region, a plurality of adjacent pixels corresponding to one color component are selected and identified as a pixel sample set. Corresponding pixel sample sets from the plurality of regions are associated into a group.

For each selected pixel, a pixel value of the selected pixel is encoded to generate a fixed length token and a variable length token. The variable length tokens for each pixel value in the set are arranged to form a variable length token vector. Further, each of the fixed length tokens are arranged to associate each bit of a pixel value with corresponding bits of other pixel values within the set. A fixed length token vector is then formed from the corresponding bits of the plurality of fixed length tokens.

For each group, a first bit stream that includes the variable length token vector from each of the plurality of regions is formed. A second bit stream is also formed. This second bit stream includes the fixed length token vectors from each of the plurality of regions. Additionally, a primary bit stream of constant length is formed. If required, a supplemental bit stream of variable length will also be formed. Both the primary bit stream and the supplemental bit stream may include data from the first and second bit streams corresponding to each of the groups.

At a minimum, the primary bit stream will contain a portion of the variable length token vectors from each group. The variable length token vectors correspond to the more significant bits representing the compressed image or frame. Thus, the data in the primary bit stream is sufficient to provide a lossy quality presentation. The supplemental bit stream contains the remaining variable length and fixed length token vectors. By decoding the data from the supplemental bit stream and the primary bit stream together, a lossless quality presentation is obtained.

An advantage of the encoding method of the present invention is that it allows one part of the compressed bit stream to be kept constant in size by sacrificing image quality.

Another advantage is that lossless compressed image data can be recorded to a fixed-bandwidth storage medium in realtime.

A further advantage is that the encoding and decoding processes are highly parallelizable which is very desirable for software or hardware implementation.

Another advantage is that when the best quality image is desired, all the data that one needs to decompress an image and present it in original (i.e., lossless) quality is available.

The foregoing and other features and advantages of the invention will be apparent from the following, more particular description of a preferred embodiment of the invention, as illustrated in the accompanying drawings.

Brief Description of the Figures

FIG. 1 illustrates how progressive lossless compressed data is organized onto a storage medium according to an embodiment of the present invention.

FIG. 2 is a block diagram illustrating a system for recording progressive lossless compressed data onto a storage medium according to an embodiment of the present invention.

FIG. 3 is a block diagram illustrating a system for lossy quality playback of compressed data from a storage medium according to an embodiment of the present invention.

FIGs. 4 and 5 are block diagrams illustrating a system for lossless quality playback of compressed data from a storage medium according to an embodiment of the present invention.

FIG. 6 is a flow diagram illustrating the general functionality of compressing data according to an embodiment of the present invention.

FIG. 7 is a flow diagram illustrating the general functionality of performing prediction error calculations, mapping, and token generation for one region according to an embodiment of the present invention.

FIG. 8 is a data flow diagram illustrating the processing of pixel value prediction error calculations and encoding of a pixel value according to an embodiment of the present invention.

FIG. 9 is a flow diagram illustrating the general functionality of generating and packing fixed length token vectors and variable length token vectors for one group of regions according to an embodiment of the present invention.

FIG. 10 is a flow diagram illustrating the general functionality of generating a primary bit stream and a supplemental bit stream according to an embodiment of the present invention.

FIG. 11 is a data flow diagram illustrating an image being compressed into a primary bit stream and a supplemental bit stream used for both lossy and lossless presentation according to an embodiment of the present invention.

FIG. 12 is a data flow diagram illustrating the reordering of fixed length token vectors for one group according to an embodiment of the present invention.

Detailed Description of the Preferred Embodiments

The preferred embodiments of the invention are described with reference to the figures in which like reference numbers indicate like elements. Furthermore, the left most digit of each reference number indicates the number of the figure in which the number is first referenced. While specific configurations and arrangements are discussed, it should be understood that this is done for illustration purposes only. A person skilled in the art will recognize that other configurations and arrangements may be used without departing from the spirit and scope of the invention.

The present invention provides a system and method for the compression and storage of data. In a preferred embodiment, the data is video frame information, such as HDTV (high definition television) video data. Thus, the preferred embodiments of the invention are described with reference to HDTV and video examples. It will be apparent, however, to a person skilled in the art that the invention can be used to compress and store a variety of different types of data.

FIG. 1 provides an illustration of how compressed data can be organized onto a tape in accordance with an embodiment of the invention. In this example implementation, the compressed data is stored on a magnetic tape 100. However, a person skilled in the art will recognize that the invention can also be used with an optical tape, magnetic disk, optical disk, RAID (redundant array of inexpensive disks) device, and the like.

Referring now to FIG. 1, header data 105 is written at the beginning of the tape 100. Header data 105 can include information about the compressed data being recorded to tape 100. Such information can include for example, the starting location of supplemental bit stream portion 135. Next, the compressed data is written to tape 100. The compressed data includes a primary bit stream portion 130 and a supplemental bit stream portion 135. Primary bit stream portion 130 includes a primary bit stream 132 for each frame of the video data written to

tape 100 in successive order. For example, bit stream one of frame one is written first. Next, bit stream one of frame two is written.

Once all of the primary bit stream data has been written onto tape 100, a plurality of supplemental bit streams 137 (e.g., one from each video frame) are written to supplemental bit stream portion 135 of tape 100. For example, bit stream two of frame one is first written into supplemental bit stream portion 135. Next, bit stream two of frame two is written. This process repeats until every supplemental bit stream for all frames have been written. When processing is completed for the entire image or sequence of images (as in the case of a movie), primary bit stream portion 130 contains sufficient data for a lossy presentation of the original data, and supplemental bit stream portion 135 contains the additional data needed for providing lossless quality data presentations.

FIG. 2 depicts a system 200 for recording compressed data onto a storage medium such as tape 100 in accordance with the present invention. An encoder 210 is used for receiving a video image to be compressed. The output of encoder 210 is a primary bit stream 132 and a supplemental bit stream 137. Bit stream 132 has a fixed length and contains sufficient data to provide a lossy quality presentation of the image or video sequence. Bit stream 137 has a variable length and contains the additional data needed to present the image or video sequence in lossless quality.

To record a frame of video data, primary bit stream 132 is copied directly onto storage medium 100. The recording of primary bit stream 132 onto storage medium 100 is done as the bit stream is received, i.e., in real-time. When supplemental bit stream 137 is received, it is temporarily stored in a memory 230. Memory 230 may be a computer hard disk or cache memory, for example.

As the bit streams for each frame are presented for recording, a frame counter 216 is incremented. Frame counter 216 begins with an initial count of zero. When processing of a batch of data (e.g., a video sequence) is completed, a total number of frames value (F_{total}) is set equal to the value of the frame counter. Once all of primary bit stream 132 has been recorded onto storage medium 100, then supplemental bit stream 137 is retrieved from memory 230 and written to the

remaining portion of storage medium 100. A person skilled in the art will recognize that storage medium 100 may become “full” before all of supplemental bit stream 137 can be written thereon. Thus, a controller device can be used to stop recording if the tape is full.

5 In one embodiment of the invention, only one image or frame is processed at a time. In this example, the supplemental bit stream is written from memory to the storage medium as soon as the writing of the primary bit stream is completed.

10 In another embodiment, several frames are processed at a time so that the supplemental bit stream for each frame is written onto the storage medium only after the primary bit stream for every frame has been encoded and written onto storage medium 100. In both of the embodiments discussed, supplemental bit stream 137 can be written onto the end of the storage medium 100 in non-real time, i.e., after completing the encoding of the image or video sequence.

15 During writing of supplemental bit stream 137 to storage medium 100, frame counter 216 is used to ensure that writing of supplemental bit stream 137 has been completed for each frame. To accomplish this, frame counter 216 is again set equal to zero. It is then incremented as each frame’s supplemental bit stream 137 is written to storage medium 100. When Frame counter 216 equals the total number of frames value (F_{total}), processing is completed.

20 FIGs. 3-5 illustrate decompression and playback of data from storage medium 100 in accordance with the present invention. There are two playback modes available: preview mode (lossy playback) and best quality mode (lossless playback). A person seeking to view an image or video sequence would be presented with the option of choosing either.

25 FIG. 3 illustrates lossy playback or preview mode. When a lossy quality presentation is desired then primary bit stream 132 is retrieved from storage medium 100 and input into decoder 235. The output from decoder 235 is a video image having a quality somewhat less than the original image.

30 FIGs. 4 and 5 illustrate presentation of images in a lossless mode. First, as shown in FIG. 4, all of the data from supplemental bit stream 137 is copied from storage medium 100 into memory 230. Second, as depicted in FIG. 5,

primary bit stream 132 from storage medium 100 and supplemental bit stream 137 from memory 230 are provided to decoder 235 for decoding together. The output from decoder 235 is a video presentation that has a quality exactly the same as the image when originally presented.

FIG. 6 shows a method for performing image compression according to the present invention; that is, a method for producing primary bit stream 132 and supplemental bit stream 137. In a preferred embodiment, method 600 is performed by encoder 210.

Method 600 begins at a step 605. In a step 610, the image to be compressed is divided into a plurality of regions. In a step 611, a group indicator value is initialized. In a step 612, a region indicator value is initialized. In a step 615, a pixel sample set comprising a number of pixels from a region within one group is selected. The group is identified by the present group indicator value.

In a step 617, a less significant bit value (L) is determined for the region. This value indicates the number of less significant bits within a pixel value. For an eight (8) bit pixel value, the number of less significant bits could range from 0 to 7. In a preferred embodiment, three bits are used to represent the value L. For ten (10), twelve (12), or sixteen (16) bit pixel values, the number of less significant bits could range from 0 to 15. In a preferred embodiment, four bits are used to represent the value L.

In a step 620, prediction error calculations are performed using the pixel values of the pixel sample set. In a step 625, fixed length tokens and variable length tokens are generated for each pixel within the pixel sample set. Steps 620-625 are described in greater detail below with reference to FIG. 7.

In a step 630, a variable length token vector is generated for the region. The variable length token vector is comprised of the variable length tokens generated in step 625. In a step 635, a fixed length token vector is generated for each bit position associated with a pixel value. Each fixed length token vector is formed from less significant bits corresponding to the same bit position for each of the fixed length tokens of the selected pixels.

In a step 637, a determination of whether there are additional regions to select from is made. If the region indicator value is less than the plurality of regions then there are additional selections to be made. In a step 639, the region indicator value is incremented and processing control is returned to step 615.

5 In a step 640, a first bit stream is generated for one group. This first bit stream is comprised of all the variable length token vectors for each region within the group. In a step 645, a second bit stream is generated for the group. This second bit stream is comprised of all the fixed length token vectors for each region within the group. Steps 630 through 645 are described in greater detail with reference to FIG. 9.

10 In a step 650, a primary bit stream is generated. This primary bit stream is comprised of data from the first bit stream and possibly the second bit stream. In a step 655, a supplemental bit stream is generated. This supplemental bit stream is comprised of any remaining first bit stream and second bit stream data not written into the primary bit stream. Steps 650 and 655 are further described with reference to FIG. 10.

15 In a step 657, the group indicator value is incremented. At a step 659, a determination of whether every pixel in the image has been compressed is made. If there are additional pixels to compress then processing control returns to step 615.

20 When processing is completed at a step 660, the primary bit stream contains the variable length token vectors for each region within the respective groups. The variable length token vectors correspond to the more significant bits representing the compressed image or frame. Thus, the data in the primary bit stream is sufficient to provide a lossy quality presentation. The supplemental bit stream contains the remaining variable length and fixed length token vectors. By decoding the data from the primary bit stream and the supplemental bit stream together, a lossless quality presentation is obtained.

25 FIG. 7 shows steps 620 and 625 for performing prediction error computation, mapping, and token generation according to an embodiment of the present invention. In this example, the prediction error computation and mapping

are performed in accordance with well known Huffman type encoding methods, such as Rice encryption. The method begins with the presentation of a pixel value in a step 705. The pixel value can be represented by any number of bits (e.g., 8, 10, 12, etc.). In a step 710, a prediction error value is calculated for each bit according to the following steps. First, prediction error (e) for the first pixel in the pixel sample set is defined as $e(0) = P(0)$. Then, the equation $e(i) = P(i-1) - P(i)$ is computed, where (i) is an index and e is a prediction error value. The index corresponds to the number of pixels selected. For example, where 32 pixel values are selected, the index value will range from 1 to 31. Each bit representing the pixel value is then set equal to its calculated prediction error value. The calculated prediction error value is usually small, therefore, fewer bits can be used to encode a series of pixels. Once the prediction errors have been determined they are mapped in accordance with the Rice encoding method. Error values from eight-bit values have nine bits. Mapping uses the information of the previous error value and reduces the error value to eight bits. One of ordinary skill in the art will understand the mapping functions thus, further details are not provided.

In a step 720, the bits less than or equal to the selected (L) value from step 617 are identified as the less significant bits of the prediction error. In a step 725, the remaining bits are defined to be the more significant bits of the prediction error. In a step 730, the less significant bits of the prediction error are identified as fixed length tokens. In a step 735, all of the more significant bits of the prediction error are variable length encoded using an entropy coding routine. Entropy coding produces variable length tokens representing the more significant bits. The variable length tokens are Huffman type code words. Method 700 ends at a step 740.

FIG. 8 provides a data flow diagram illustrating the prediction error step 620 and token generation process step 625 as described in FIG. 7. Here, prediction error computation is performed on an 8 bit pixel value 810 as indicated at block 805. A prediction error value 815 is calculated for each bit according to step 710 described above. Next, the prediction error value is split into more significant bits and less significant bits according to a less significant bit value (L).

For eight (8) bit pixel values, the number of less significant bits is three (3). Accordingly, the right most number of bits equal to the selected (L) values are identified as the less significant bits 825. The remaining bits are defined to be the more significant bits 830. Next, more significant bits 830 are variable length encoded using an entropy coding routine as indicated at block 835. Entropy coding produces variable length tokens 840 representing the more significant bits. The less significant bits of the prediction error are designated as fixed length tokens 845.

FIG. 9 further describes the steps 630 and 635 of generating the variable length token vectors and fixed length token vectors. In a step 905, a region indicator number is initialized. In a step 910, a variable length token vector is generated for a region by concatenating the absolute value of the first pixel value and the variable length tokens for the remaining pixel values. The variable length tokens are arranged in ascending order within the variable length token vector based upon their respective pixel bit positions (e.g., P_0 to P_{31}).

In a step 918, a fixed length token vector for one region is generated by copying one bit of each fixed length token and concatenate those bits into a fixed length token vector. There will be a fixed length token vector corresponding to each less significant bit position. The remaining steps involve packing the variable length token vectors into a first bit stream (bit stream 1) and the fixed length token vectors into a second bit stream (bit stream 2) in accordance with steps 640 and 645.

First, in a step 920, a current bit position value is set equal to the less significant number bit value (L) associated with the region. Next, in a step 922, the variable length token vector for the region is packed into a first bit stream (bit stream 1). In a step 923, a determination is made of whether the variable length token vector packing process has been completed for each region. If not, then in a step 924, the region indicator number is incremented and control is returned to step 910. When the result of determination step 923 is yes, the variable length token vectors for each region will have been arranged in ascending order within bit stream 1 based upon their respective region. (e.g., R_0 to R_{\max}).

In a step 925, the region indicator number is initialized again. Beginning with the region corresponding to the region indicator number, in a step 926, a determination is made of whether the region has a fixed length token vector corresponding to the current bit position value. If the result is yes, then in a step 927, the fixed length token vector from that region is copied into bit stream 2. In a step 928, a determination of whether all the regions have been checked is made. If the region indicator number is equal to the plurality of regions then all the regions have been checked. If there are additional regions to check then at a step 929, the region indicator number is incremented and processing is returned to step 926.

In a step 930, the current bit position value is set equal to the current bit position value minus one. In a step 935, a determination of whether the current bit position value equals zero is made. If it does not then processing is returned to step 925. When processing ends at a step 940, bit stream 1 has been generated and contains all the variable length token vectors for each region within a particular group. Likewise, bit stream 2 has been generated and contains all of the fixed length token vectors for each region within the same group.

FIG. 10 describes the steps 650 and 655 for generation of a primary and possibly supplemental bit stream according to the present invention. The primary bit stream is comprised of segments having a fixed length. In a step 1008, the maximum size of each groups segment (N) is defined. The size of the group segment is dependent upon the bandwidth limitations imposed by the storage media used to store the compressed data.

In a step 1015, N bits are retrieved from bit stream 1 and bit stream 2 and copied into the group allocated segment within the primary bit stream. In a step 1020, a determination of whether additional data remains to be copied is made. If the value N is less than the combined length of bit stream 1 and bit stream 2, then there will be additional data to copy.

The supplemental bit stream can be expanded to any length necessary to hold the remaining data from bit streams 1 and 2. Thus, the supplemental bit stream will have a variable length. If additional data needs to be copied then in a

step 1025, the remaining portions of bit stream 1 and/or bit stream 2 are written into a supplemental bit stream. Next, in a step 1027, the end of the supplemental bit stream is padded with bits so that the length of the group's segment within the supplemental bit stream is equal to 1 byte. In a step 1030, each group's segment length within the supplemental bit stream is determined and appended to the header portion of the supplemental bit stream. The group segment length value can be determined by subtracting (N) from the combined length of bit stream 1 and bit stream 2. In the case where no additional data was copied, the group segment length value would be equal to zero. The group segment length values are useful for providing random or arbitrary access to the respective group portions of the supplemental bit stream. This ability to access the data in this manner makes parallelizing possible. When processing is completed at a step 1040, the primary bit stream, and if generated, the supplemental bit stream, will contain data corresponding to each group identified during the compression process.

The maximum number of groups to be identified is dependant upon the type of image frame being compressed. For example, a standard definition NTSC video frame has (720 X 487 pixels). If 32 pixel values are taken from 4 regions, the maximum number of groups for the image would be:

$$G_{\max} = 720 * 487 * 3 \text{ (color components)} / (4 * 32) = 8218.12 \text{ or } 8,219 \text{ groups.}$$

In another example, an HDTV video frame has (1920 X 1080 pixels). If 32 pixel values are taken from 4 regions, the maximum number of groups for the image would be:

$$G_{\max} = 1920 * 1080 * 3 / (4 * 32) = 48,600 \text{ groups.}$$

An example application of the above described method will now be discussed with respect to FIG. 11. An image 1105 having three (3) color components (e.g., Red, Green, and Blue) per pixel has been presented for compression. There are eight (8) bits used to represent each color component. One color component is processed at a time. The input image 1105 is divided into a plurality of regions 1110. For purpose of illustration, regions 1110A-1110D are depicted. (also referred to as regions r_0 - r_3) From each of these regions, a pixel sample set 1111 is selected by choosing a plurality of adjacent pixels for encoding.

The pixel sample sets 1111A-1111D can be selected from anywhere within the respective regions. In a preferred embodiment, a symmetrical selection routine is used. Accordingly, beginning with the first region 1110A, a pixel sample set 1111A is selected from the fourth row. In a preferred embodiment, 32 adjacent pixels are selected. Next, from the second region 1110B, a pixel sample set 1111B is selected from an offset of the first region 1110A. The offset can be four rows for example. The goal is to obtain a representative sample of the whole image. From the third region 1110C, a pixel sample set 1111C is selected from row twelve (12). Finally, pixel set 1111D is selected from row sixteen (16) of region 1110D. Selection of pixel sample sets for a next group will begin on the next row of each respective region. When the last row of a region has been reached, the next pixel sample set selection is made from the top of the region and continues down until all pixels have been processed.

The encoding routine is performed for this first group as described in steps 710-735 and produces a bit stream corresponding to each respective region. For example, by inputting four 32 pixel value sets 1111A, 1111B, 1111C, and 1111D, the output would be four encoded bit streams 1115A-1115D corresponding to Region 0 through Region 3 (R_0 - R_3).

As shown, each bit stream 1115A-1115D has a header portion indicating the number of less significant bits represented within the bit stream. The bit streams further include the absolute value of the first pixel value in the set (P0) and tokens representing the calculated prediction error values for pixel values one (P1) through thirty-one (P31). The tokens are designated as either variable length 1117 or fixed length 1118.

Each of the four bit streams 1115A-1115D resulting from the encoding process are rearranged and combined to produce a single bit stream 1119 according to the routine described in steps 905-935. Bit stream 1119 is comprised of two portions. The first portion 1120 contains the variable length token vectors corresponding to the variable length tokens 1117. The second portion 1122 contains specially arranged fixed length token vectors corresponding to the fixed length tokens 1118. The fixed length token arranging scheme is further described

with respect to FIG. 12. A primary bit stream 1130 is comprised of data from the first portion 1120 and the second portion 1122 of bit stream 1119. A supplemental bit stream 1135 is comprised of the remaining data from the second portion 1122 of bit stream 1119. Primary bit stream 1130 has sufficient data to provide a lossy quality presentation. Similarly, primary bit stream 1130 and supplemental bit stream 1135 taken together can be decoded to provide a lossless quality presentation.

FIG. 12 provides a data flow diagram for the reordering of the second portion 1122 of bit stream 1119 according to the present invention. Data from the regions 1115A-1115D is depicted. In block 1212, a fixed length token vector 1215 is generated for each region 1115 by concatenating the fixed length tokens 1118 for each pixel bit (P1) - (P31). Each region has a fixed length token vector 1215 corresponding to each less significant bit position.

To pack the fixed length token vectors, a current bit position value is set equal to the highest value (L) associated with each region within a group as described in step 920 of FIG. 9. Here, the current bit position value equals four. Next, as described in step 925, beginning with the first region 1115A, a determination is made of whether the region has a fixed length token vector 1215 corresponding to the current bit position value. If the result is yes, then as referenced in step 927, the fixed length token vector from that region is copied into the second bit stream. The above steps are repeated for the next region until all of the regions have been considered. In this case, the first vector corresponding to current bit position value is found in the second region 1115B (fixed length token vector 1215A). This vector is combined with any other corresponding vectors (in this case there are none) to produce combined vector 1216. Combined vector 1216 is written into the fixed length portion 1122 of bit stream 1119. Next, the current bit position is set equal to the current bit position value minus one. The above fixed length token vector packing process is repeated until the current bit position value equals zero. Thus, combined vectors 1218, 1220 and 1222 are generated. Combined vector 1218 is comprised of fixed length token vectors 1215B and 1215C. Combined vector 1220 is comprised of fixed

5

SGI Reg: 15-4-1062.00
SKGF Ref: 1452.3080000

What Is Claimed Is:

1. A method for recording data onto a storage medium, comprising the steps of:

(a) receiving a plurality of primary bit streams of fixed length and a plurality of supplemental bit streams of variable length from a codec, said plurality of primary bit streams and said plurality of supplemental bit streams representing data to be recorded onto the storage medium;

(b) recording each of said plurality of primary bit streams onto the storage medium;

(c) storing each of said plurality of supplemental bit streams in a temporary memory location; and

(d) after said plurality of primary bit streams have been recorded onto the storage medium, retrieving said plurality of supplemental bit streams from said temporary memory location and recording said supplemental bit streams onto the storage medium.

2. The method of claim 1 wherein said plurality of primary bit streams are recorded onto the storage medium in real time as they are received from said codec and wherein said plurality of supplemental bit streams are recorded onto the storage medium in a non-real time manner after recording of said plurality of primary bit streams.

3. The method of claim 1 wherein a progressive lossless codec generates said plurality of primary bit streams of fixed length and said plurality of supplemental bit streams of variable length.

4. The method of claim 3 wherein said plurality of primary bit streams and said plurality of supplemental bit streams are generated from image data.

5. The method of claim 3 wherein said plurality of primary bit streams and said plurality of supplemental bit streams are generated from high definition image data.

6. The method of claim 1 wherein the storage medium is a high definition tape.

7. The method of claim 1 wherein the storage medium is a hard disk array.

8. A method for providing selectable quality presentation of compressed data stored on a storage medium, comprising the steps of:

- (a) determining a desired data presentation quality level;
- (b) if said desired data presentation quality level is lossy, then
 - (i) retrieving a primary portion of the compressed data from the storage medium, and
 - (ii) decoding said primary portion of the compressed data;
- (c) if said desired data presentation quality level is lossless, then
 - (i) retrieving said primary portion and a supplemental portion of the compressed data from the storage medium, and
 - (ii) decoding said primary and supplemental portions of the compressed data; and
- (d) presenting said decoded data.

9. The method of claim 8, wherein said primary portion of the compressed data comprises variable length token vectors or a combination of variable length token vectors and fixed length token vectors.

10. The method of claim 9, wherein said supplemental portion of the compressed data comprises fixed length token vectors, a combination of fixed length token vectors and variable length token vectors, or nothing at all.

11. The method of claim 10, further comprising the step of: transferring said variable length compressed data to a temporary memory location prior to said step of decoding said primary and supplemental portions of the compressed data.

12. A data storage product comprising a machine readable medium having stored thereon compressed data in a progressive lossless format that facilitates selective data presentation with either lossy quality or lossless quality.

13. The data storage product of claim 12 wherein said compressed data comprises header data, variable length data, and fixed length data.

14. The data storage product of claim 12 wherein said machine readable medium is a high definition tape.

15. The data storage product of claim 12 wherein said machine readable medium is a hard disk array.

16. A data compression system for recording data onto storage media, comprising:

(a) a codec for generating a plurality of primary bit

streams of fixed length and a plurality of supplemental bit streams of variable length, said plurality of primary and supplemental bit streams representing data to be recorded onto the storage media;

(b) means for receiving said generated plurality of primary bit streams and said plurality of supplemental bit streams;

(c) memory for storing each of said plurality of supplemental bit streams; and

(d) means for recording onto the storage media each of said plurality of primary bit streams and said plurality of supplemental bit streams.

17. The data compression system of claim 16 wherein said codec is a progressive lossless codec.

18. A system for providing selectable quality presentation of compressed data stored on a storage medium, comprising:

(a) means for determining a desired data presentation quality level;

(b) means for retrieving a primary portion of the compressed data and a supplemental portion of the compressed data from the storage medium; and

(c) means for decoding said primary portion and said supplemental portion of the compressed data to facilitate selective data presentation with either lossy quality or lossless quality.

19. The method of claim 18 wherein said means for decoding said primary portion and said supplemental portion of the compressed data to facilitate selective data presentation with either lossy quality or lossless quality is a progressive lossless codec.

System and Method for Storing Compressed Data Onto a Storage Medium

A system and method for recording compressed data onto a storage medium so that it can be presented later in either lossy or lossless quality. The method receives a plurality of primary bit streams and supplemental bit streams representing data to be recorded onto the storage medium. Each primary bit stream is recorded onto the storage medium as it is received. As each of the supplemental bit streams are received, they are stored in a temporary memory location. After the primary bit streams have been recorded onto the storage medium, the supplemental bit streams are retrieved from the temporary memory location and recorded onto the storage medium. The recording process is completed when all the primary bit stream data and the supplemental bit stream data have been written onto the storage medium. To present the data, a user is given the option of viewing the data in either lossy quality or lossless quality. If lossy quality is selected, then the primary bit stream is retrieved from the storage medium and decoded. If lossless quality is selected, then the supplemental bit stream is retrieved from the storage medium and copied in a temporary memory location. Once this step is completed, the primary bit stream and the supplemental bit stream are decoded together.

Organization of lossless progressive data on tape

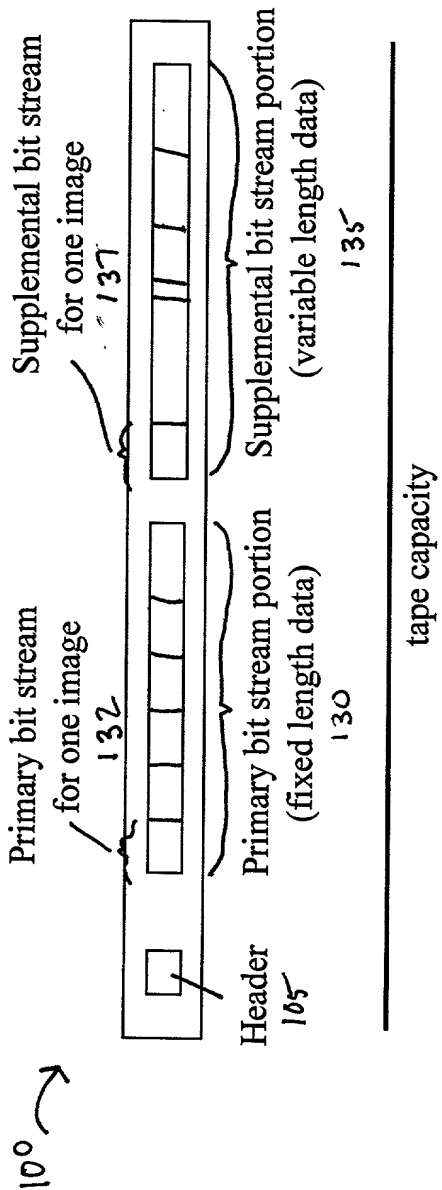


FIG. 1

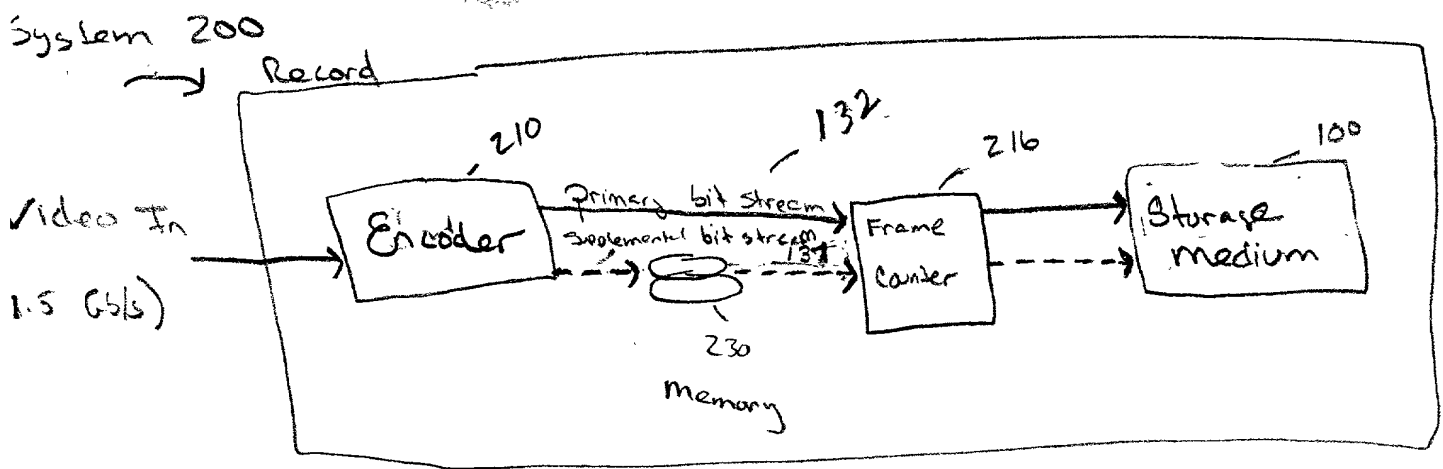


FIG. 2

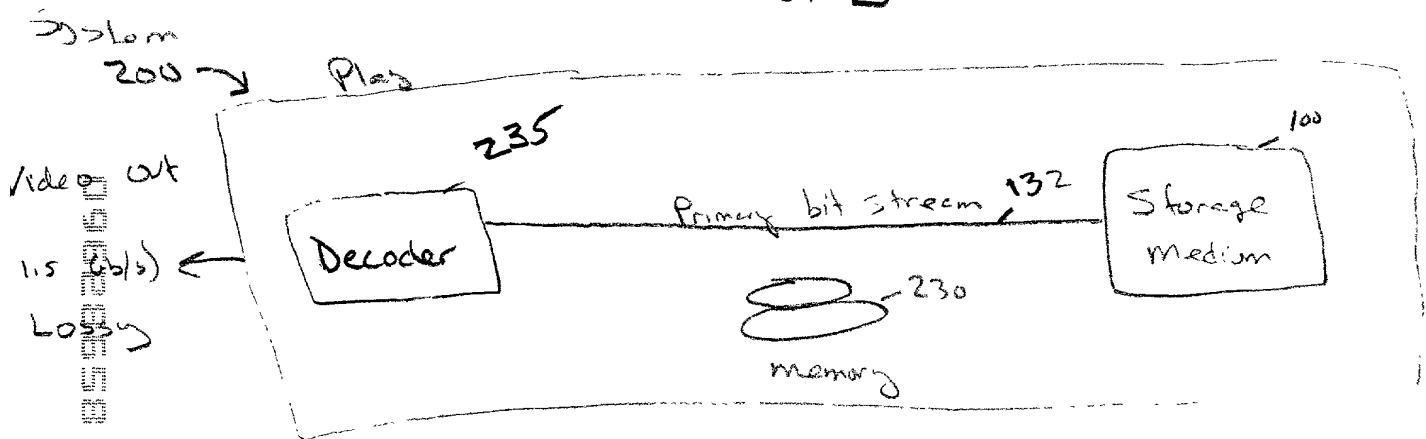


FIG. 3

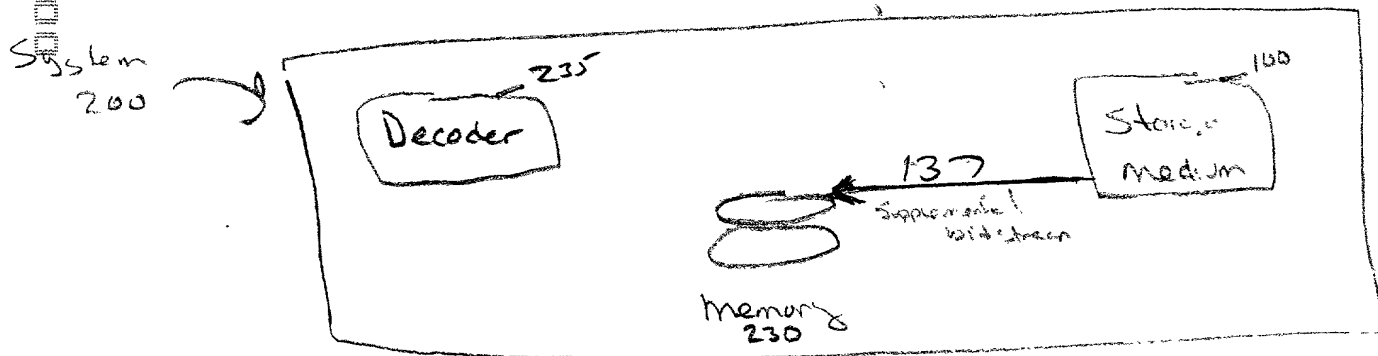


FIG. 4

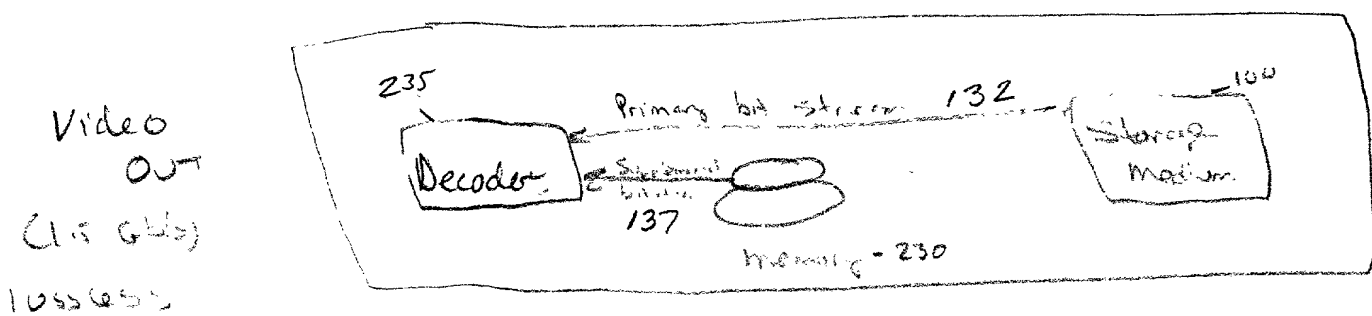


FIG. 5

105



720

725

-730

-735

End

1. **Introduction**
 2. **Background**
 3. **Methods**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Table 1**
 10. **Table 2**
 11. **Table 3**
 12. **Table 4**
 13. **Table 5**
 14. **Table 6**
 15. **Table 7**
 16. **Table 8**
 17. **Table 9**
 18. **Table 10**
 19. **Table 11**
 20. **Table 12**
 21. **Table 13**
 22. **Table 14**
 23. **Table 15**
 24. **Table 16**
 25. **Table 17**
 26. **Table 18**
 27. **Table 19**
 28. **Table 20**
 29. **Table 21**
 30. **Table 22**
 31. **Table 23**
 32. **Table 24**
 33. **Table 25**
 34. **Table 26**
 35. **Table 27**
 36. **Table 28**
 37. **Table 29**
 38. **Table 30**
 39. **Table 31**
 40. **Table 32**
 41. **Table 33**
 42. **Table 34**
 43. **Table 35**
 44. **Table 36**
 45. **Table 37**
 46. **Table 38**
 47. **Table 39**
 48. **Table 40**
 49. **Table 41**
 50. **Table 42**
 51. **Table 43**
 52. **Table 44**
 53. **Table 45**
 54. **Table 46**
 55. **Table 47**
 56. **Table 48**
 57. **Table 49**
 58. **Table 50**
 59. **Table 51**
 60. **Table 52**
 61. **Table 53**
 62. **Table 54**
 63. **Table 55**
 64. **Table 56**
 65. **Table 57**
 66. **Table 58**
 67. **Table 59**
 68. **Table 60**
 69. **Table 61**
 70. **Table 62**
 71. **Table 63**
 72. **Table 64**
 73. **Table 65**
 74. **Table 66**
 75. **Table 67**
 76. **Table 68**
 77. **Table 69**
 78. **Table 70**
 79. **Table 71**
 80. **Table 72**
 81. **Table 73**
 82. **Table 74**
 83. **Table 75**
 84. **Table 76**
 85. **Table 77**
 86. **Table 78**
 87. **Table 79**
 88. **Table 80**
 89. **Table 81**
 90. **Table 82**
 91. **Table 83**
 92. **Table 84**
 93. **Table 85**
 94. **Table 86**
 95. **Table 87**
 96. **Table 88**
 97. **Table 89**
 98. **Table 90**
 99. **Table 91**
 100. **Table 92**
 101. **Table 93**
 102. **Table 94**
 103. **Table 95**
 104. **Table 96**
 105. **Table 97**
 106. **Table 98**
 107. **Table 99**
 108. **Table 100**
 109. **Table 101**
 110. **Table 102**
 111. **Table 103**
 112. **Table 104**
 113. **Table 105**
 114. **Table 106**
 115. **Table 107**
 116. **Table 108**
 117. **Table 109**
 118. **Table 110**
 119. **Table 111**
 120. **Table 112**
 121. **Table 113**
 122. **Table 114**
 123. **Table 115**
 124. **Table 116**
 125. **Table 117**
 126. **Table 118**
 127. **Table 119**
 128. **Table 120**
 129. **Table 121**
 130. **Table 122**
 131. **Table 123**
 132. **Table 124**
 133. **Table 125**
 134. **Table 126**
 135. **Table 127**
 136. **Table 128**
 137. **Table 129**
 138. **Table 130**
 139. **Table 131**
 140. **Table 132**
 141. **Table 133**
 142. **Table 134**
 143. **Table 135**
 144. **Table 136**
 145. **Table 137**
 146. **Table 138**
 147. **Table 139**
 148. **Table 140**
 149. **Table 141**
 150. **Table 142**
 151. **Table 143**
 152. **Table 144**
 153. **Table 145**
 154. **Table 146**
 155. **Table 147**
 156. **Table 148**
 157. **Table 149**
 158. **Table 150**
 159. **Table 151**
 160. **Table 152**
 161. **Table 153**
 162. **Table 154**
 163. **Table 155**
 164. **Table 156**
 165. **Table 157**
 166. **Table 158**
 167. **Table 159**
 168. **Table 160**
 169. **Table 161**
 170. **Table 162**
 171. **Table 163**
 172. **Table 164**
 173. **Table 165**
 174. **Table 166**
 175. **Table 167**
 176. **Table 168**
 177. **Table 169**
 178. **Table 170**
 179. **Table 171**
 180. **Table 172**
 181. **Table 173**
 182. **Table 174**
 183. **Table 175**
 184. **Table 176**
 185. **Table 177**
 186. **Table 178**
 187. **Table 179**
 188. **Table 180**
 189. **Table 181**
 190. **Table 182**
 191. **Table 183**
 192. **Table 184**
 193. **Table 185**
 194. **Table 186**
 195. **Table 187**
 196. **Table 188**
 197. **Table 189**
 198. **Table 190**
 199. **Table 191**
 200. **Table 192**
 201. **Table 193**
 202. **Table 194**
 203. **Table 195**
 204. **Table 196**
 205. **Table 197**
 206. **Table 198**
 207. **Table 199**
 208. **Table 200**
 209. **Table 201**
 210. **Table 202**
 211. **Table 203**
 212. **Table 204**
 213. **Table 205**
 214. **Table 206**
 215. **Table 207**
 216. **Table 208**
 217. **Table 209**

805
810
815
820
825
830
835
840
845

Prediction,
error computation,
mapping

Split Prediction Error
into More and
Less Significant bits
based on L Value

Variable length
encoding
(entropy coding)

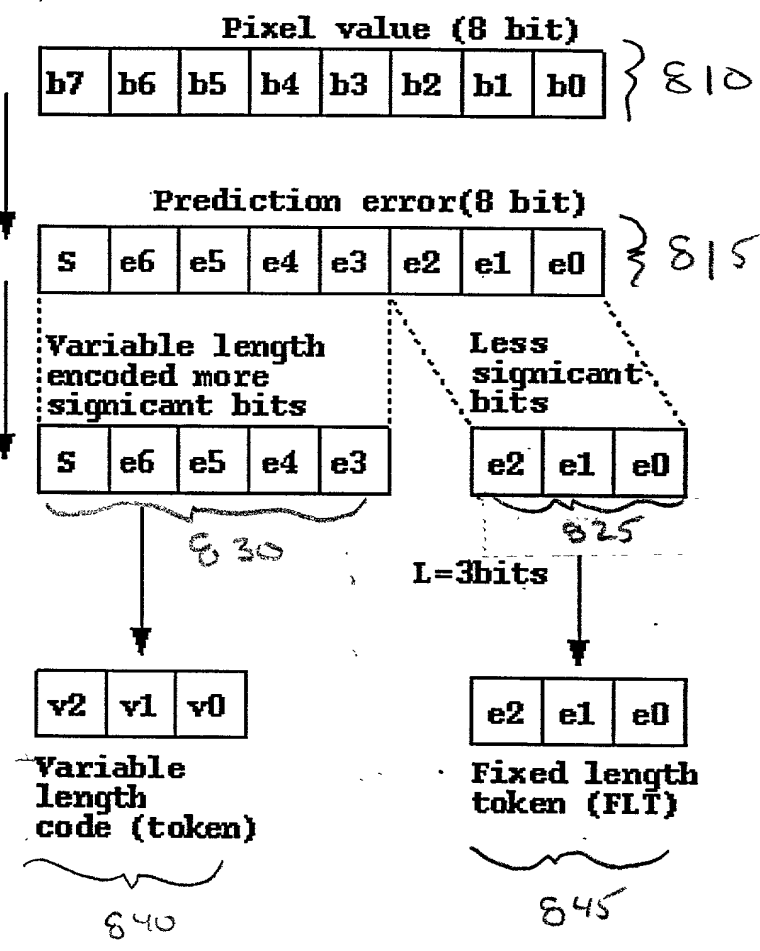
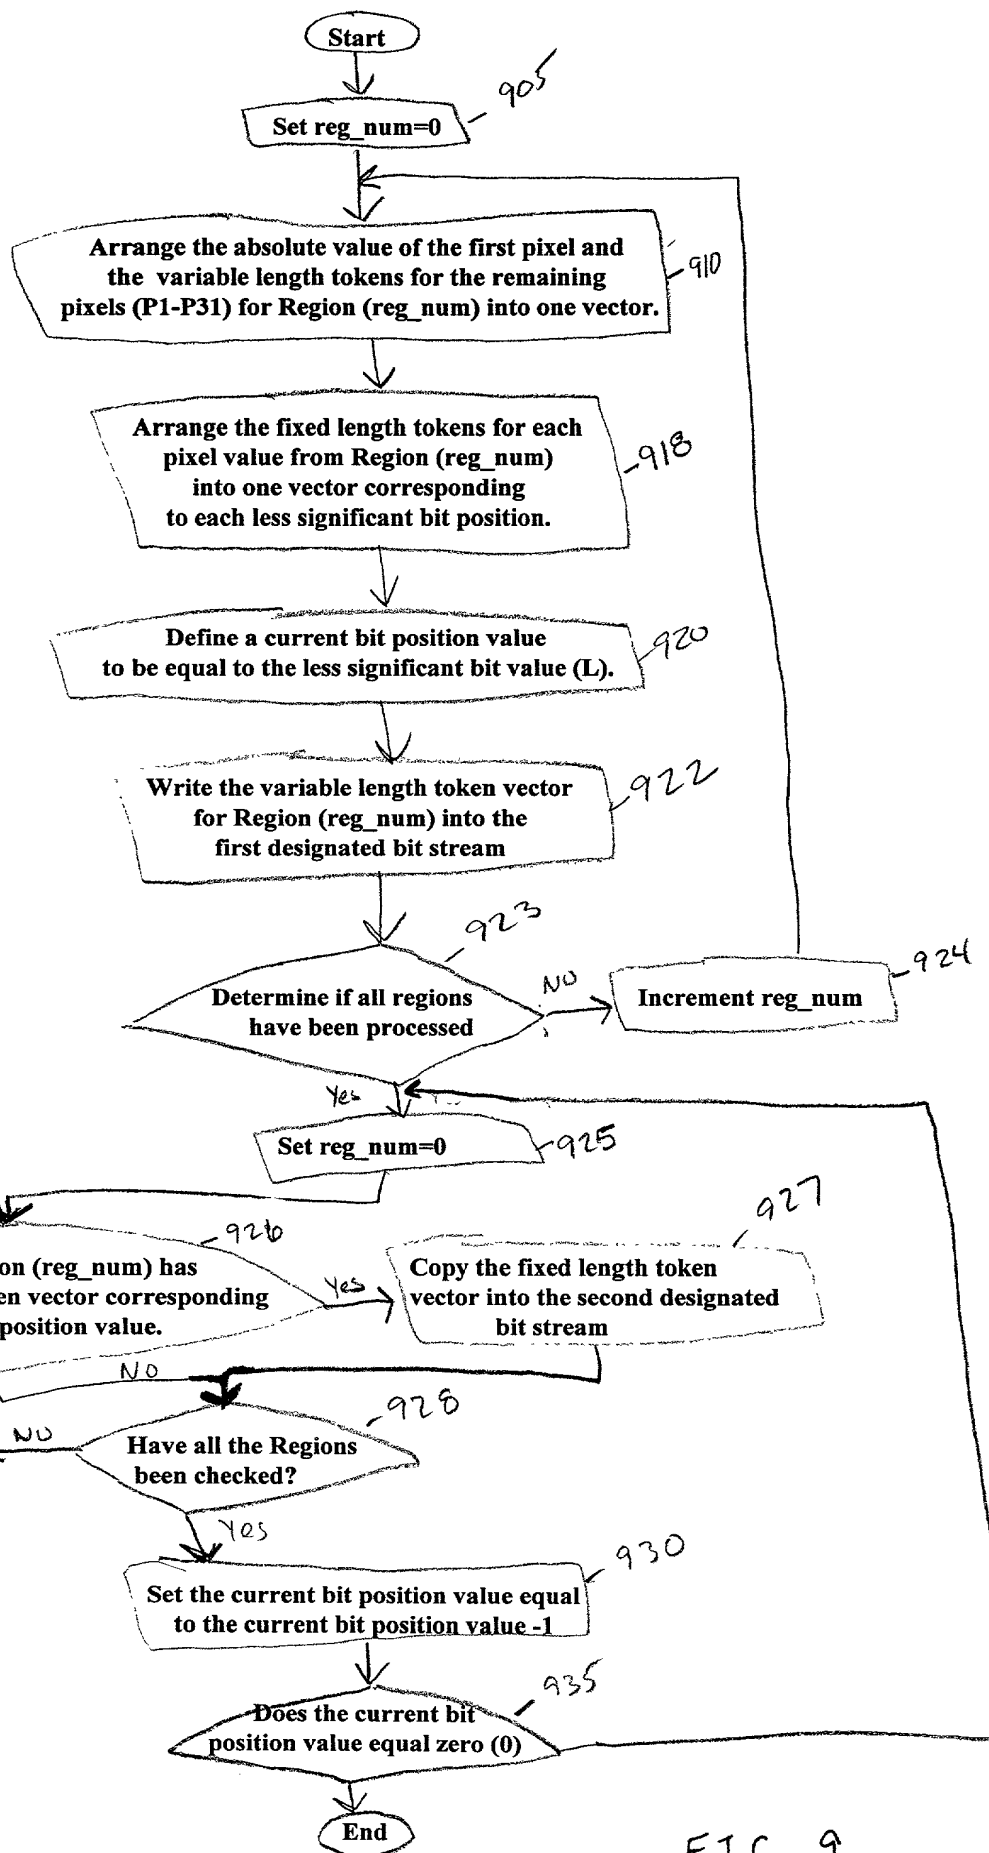


FIG. 8


```

graph TD
    925[Set reg_num=0] --> 926{Determine if Region (reg_num) has  
a fixed length token vector  
corresponding to the current  
bit position value.}
    926 -- Yes --> 927[Copy the fixed length token  
vector into the second designated  
bit stream]
    926 -- NO --> 928{Have all the Regions  
been checked?}
    927 --> 928
    928 -- NO --> 929[Increment  
reg_num]
    929 --> 926
    928 -- Yes --> 930[Set the current bit position value  
equal to the current bit position  
value -1]
    930 --> 935{Does the current bit  
position value equal zero (0)}
    935 --> End([End])
  
```

FIG. 9



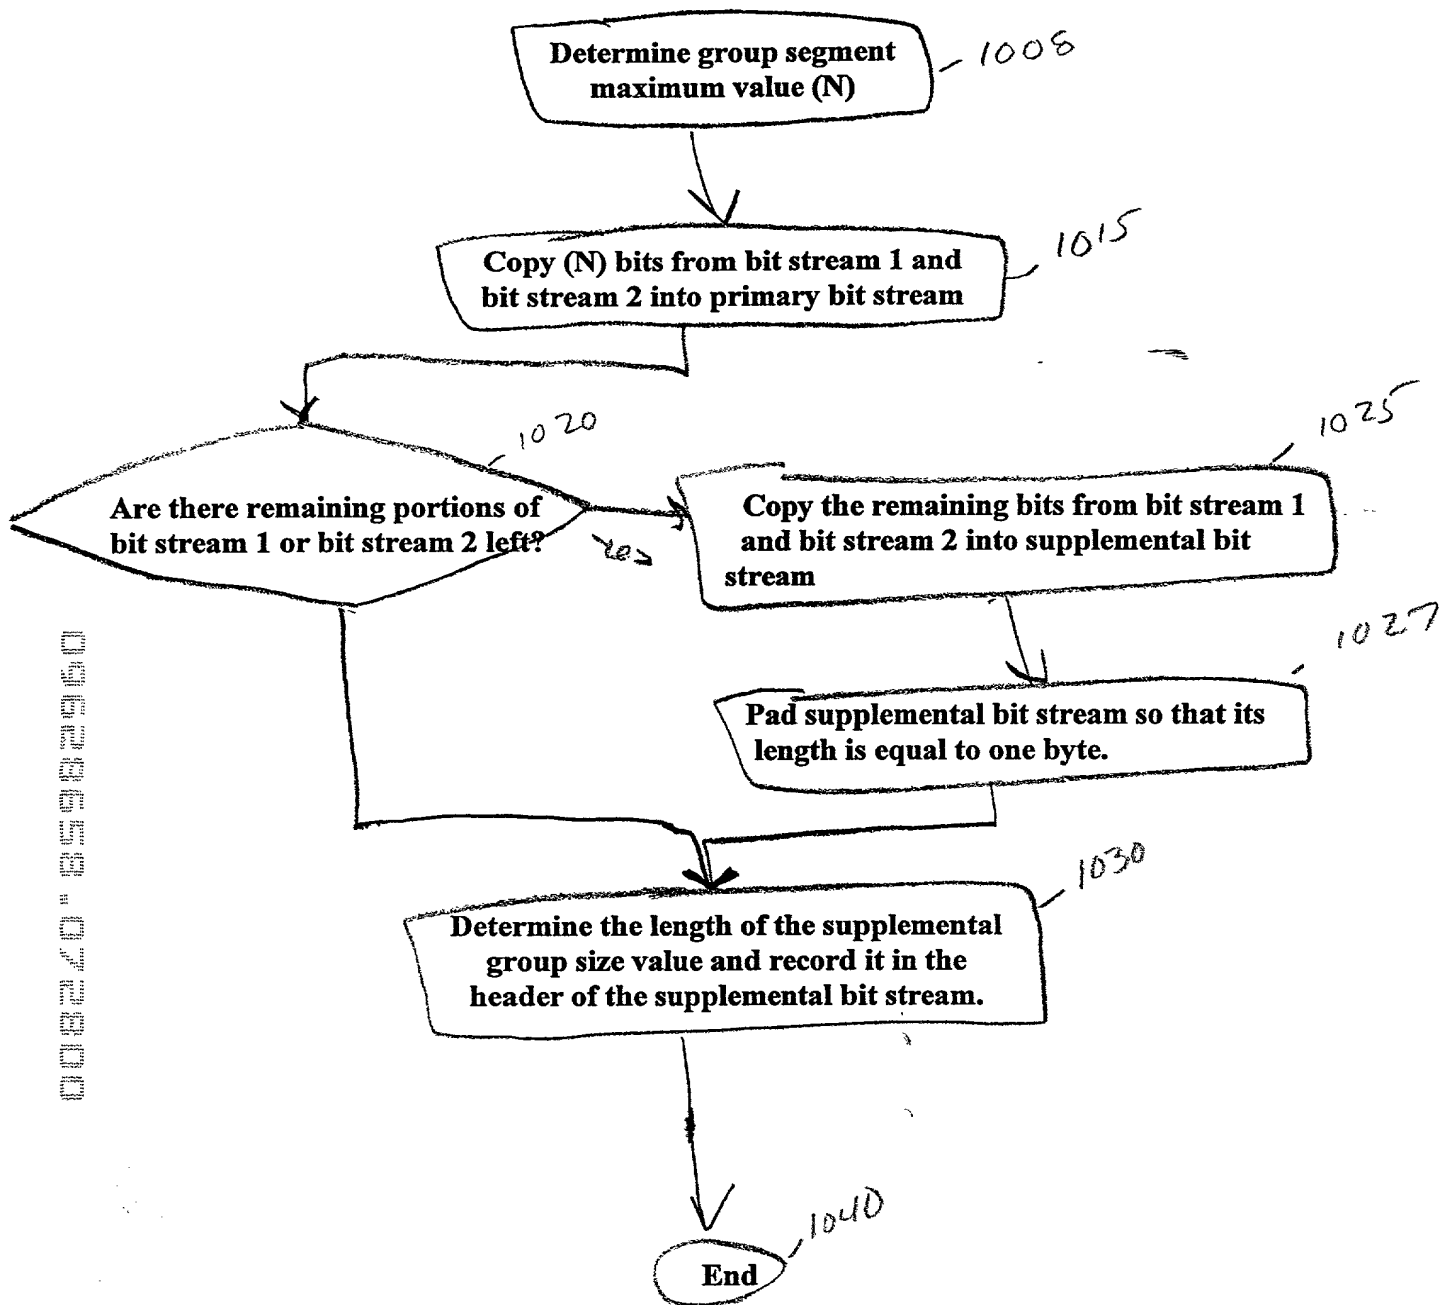


FIG. 10

Progressive Lossless Compression

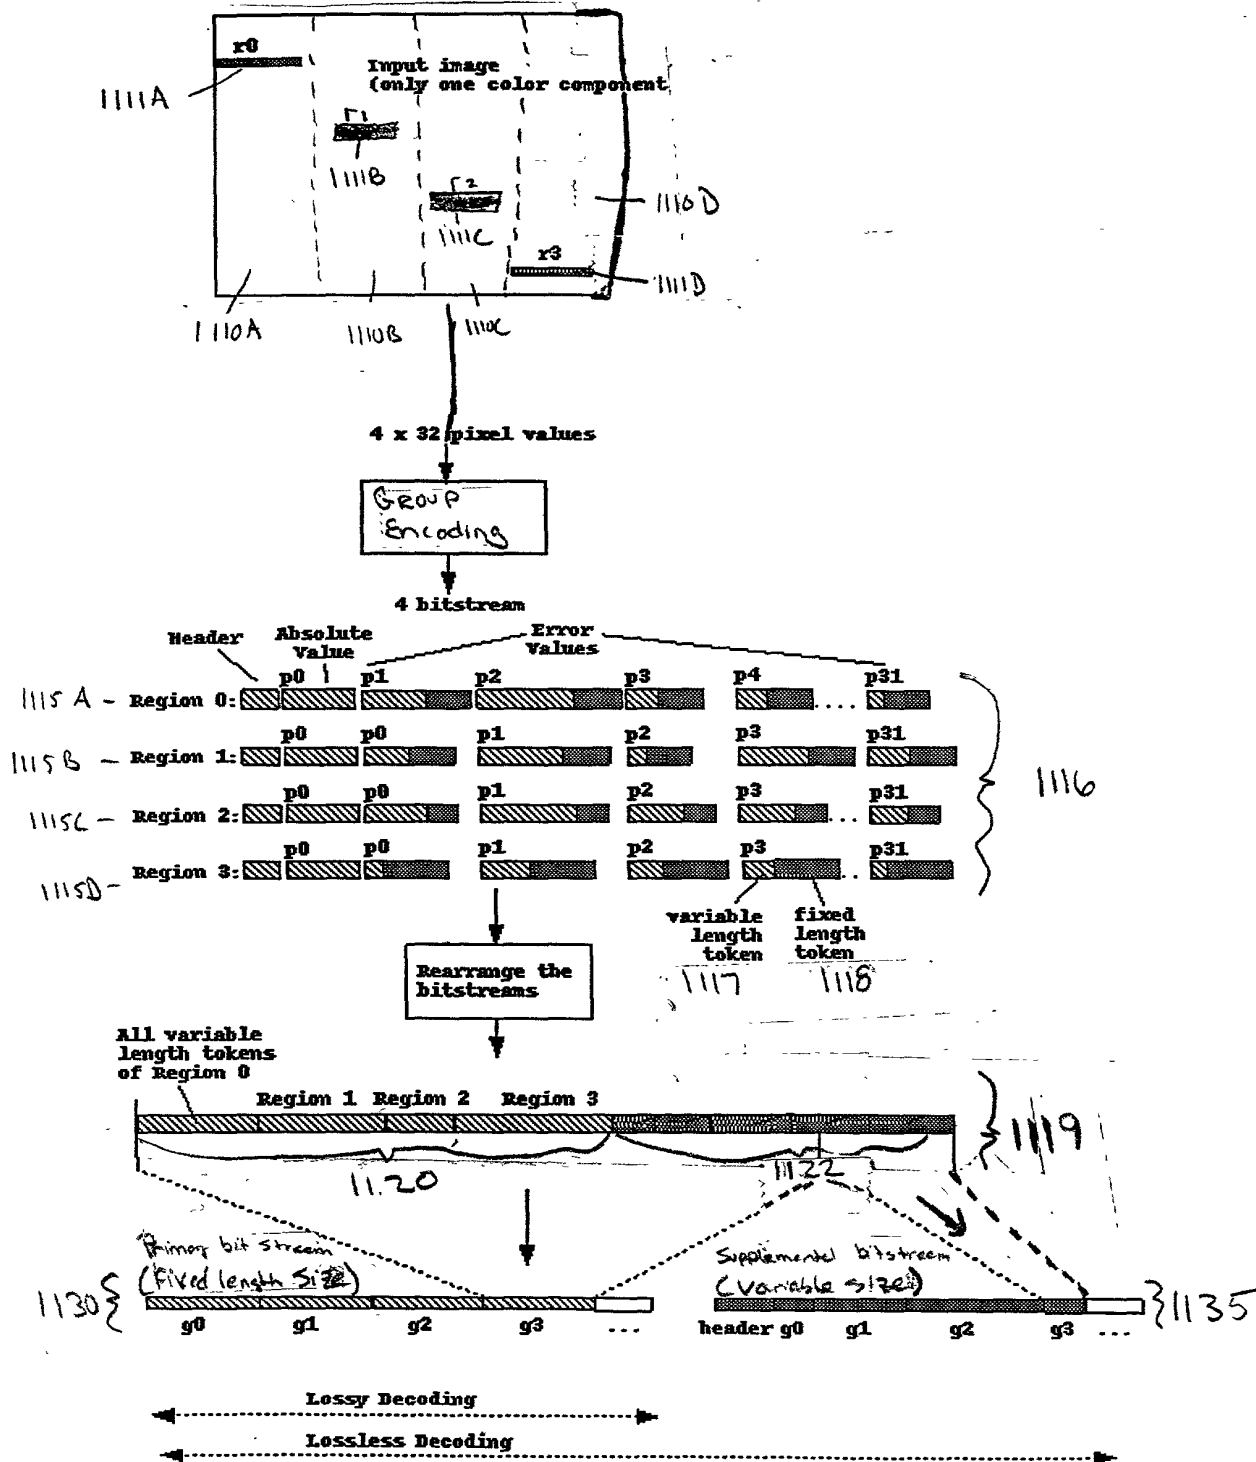


FIG 11

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Figure 1**
 10. **Figure 2**
 11. **Figure 3**
 12. **Figure 4**
 13. **Figure 5**
 14. **Figure 6**
 15. **Figure 7**
 16. **Figure 8**
 17. **Figure 9**
 18. **Figure 10**
 19. **Figure 11**
 20. **Figure 12**
 21. **Figure 13**
 22. **Figure 14**
 23. **Figure 15**
 24. **Figure 16**
 25. **Figure 17**
 26. **Figure 18**
 27. **Figure 19**
 28. **Figure 20**
 29. **Figure 21**
 30. **Figure 22**
 31. **Figure 23**
 32. **Figure 24**
 33. **Figure 25**
 34. **Figure 26**
 35. **Figure 27**
 36. **Figure 28**
 37. **Figure 29**
 38. **Figure 30**
 39. **Figure 31**
 40. **Figure 32**
 41. **Figure 33**
 42. **Figure 34**
 43. **Figure 35**
 44. **Figure 36**
 45. **Figure 37**
 46. **Figure 38**
 47. **Figure 39**
 48. **Figure 40**
 49. **Figure 41**
 50. **Figure 42**
 51. **Figure 43**
 52. **Figure 44**
 53. **Figure 45**
 54. **Figure 46**
 55. **Figure 47**
 56. **Figure 48**
 57. **Figure 49**
 58. **Figure 50**
 59. **Figure 51**
 60. **Figure 52**
 61. **Figure 53**
 62. **Figure 54**
 63. **Figure 55**
 64. **Figure 56**
 65. **Figure 57**
 66. **Figure 58**
 67. **Figure 59**
 68. **Figure 60**
 69. **Figure 61**
 70. **Figure 62**
 71. **Figure 63**
 72. **Figure 64**
 73. **Figure 65**
 74. **Figure 66**
 75. **Figure 67**
 76. **Figure 68**
 77. **Figure 69**
 78. **Figure 70**
 79. **Figure 71**
 80. **Figure 72**
 81. **Figure 73**
 82. **Figure 74**
 83. **Figure 75**
 84. **Figure 76**
 85. **Figure 77**
 86. **Figure 78**
 87. **Figure 79**
 88. **Figure 80**
 89. **Figure 81**
 90. **Figure 82**
 91. **Figure 83**
 92. **Figure 84**
 93. **Figure 85**
 94. **Figure 86**
 95. **Figure 87**
 96. **Figure 88**
 97. **Figure 89**
 98. **Figure 90**
 99. **Figure 91**
 100. **Figure 92**
 101. **Figure 93**
 102. **Figure 94**
 103. **Figure 95**
 104. **Figure 96**
 105. **Figure 97**
 106. **Figure 98**
 107. **Figure 99**
 108. **Figure 100**
 109. **Figure 101**
 110. **Figure 102**
 111. **Figure 103**
 112. **Figure 104**
 113. **Figure 105**
 114. **Figure 106**
 115. **Figure 107**
 116. **Figure 108**
 117. **Figure 109**
 118. **Figure 110**
 119. **Figure 111**
 120. **Figure 112**
 121. **Figure 113**
 122. **Figure 114**
 123. **Figure 115**
 124. **Figure 116**
 125. **Figure 117**
 126. **Figure 118**
 127. **Figure 119**
 128. **Figure 120**
 129. **Figure 121**
 130. **Figure 122**
 131. **Figure 123**
 132. **Figure 124**
 133. **Figure 125**
 134. **Figure 126**
 135. **Figure 127**
 136. **Figure 128**
 137. **Figure 129**
 138. **Figure 130**
 139. **Figure 131**
 140. **Figure 132**
 141. **Figure 133**
 142. **Figure 134**
 143. **Figure 135**
 144. **Figure 136**
 145. **Figure 137**
 146. **Figure 138**
 147. **Figure 139**
 148. **Figure 140**
 149. **Figure 141**
 150. **Figure 142**
 151. **Figure 143**
 152. **Figure 144**
 153. **Figure 145**
 154. **Figure 146**
 155. **Figure 147**
 156. **Figure 148**
 157. **Figure 149**
 158. **Figure 150**
 159. **Figure 151**
 160. **Figure 152**
 161. **Figure 153**
 162. **Figure 154**
 163. **Figure 155**
 164. **Figure 156**
 165. **Figure 157**
 166. **Figure 158**
 167. **Figure 159**
 168. **Figure 160**
 169. **Figure 161**
 170. **Figure 162**
 171. **Figure 163**
 172. **Figure 164**
 173. **Figure 165**
 174. **Figure 166**
 175. **Figure 167**
 176. **Figure 168**
 177. **Figure 169**
 178. **Figure 170**
 179. **Figure 171**
 180. **Figure 172**
 181. **Figure 173**
 182. **Figure 174**
 183. **Figure 175**
 184. **Figure 176**
 185. **Figure 177**
 186. **Figure 178**
 187. **Figure 179**
 188. **Figure 180**
 189. **Figure 181**
 190. **Figure 182**
 191. **Figure 183**
 192. **Figure 184**
 193. **Figure 185**
 194. **Figure 186**
 195. **Figure 187**
 196. **Figure 188**
 197. **Figure 189**
 198. **Figure 190**
 199. **Figure 191**
 200. **Figure 192**
 201. **Figure 193**
 202. **Figure 194**
 203. **Figure 195**
 204. **Figure 196**
 205. **Figure 197**
 206. **Figure 198**
 207. **Figure 199**
 208. **Figure 200**
 209. **Figure 201**
 210. **Figure 202**
 211. **Figure 203**
 212. **Figure 204**
 213. **Figure 205**
 214. **Figure 206**
 215. **Figure 207**
 216. **Figure 208**
 217. **Figure 209**

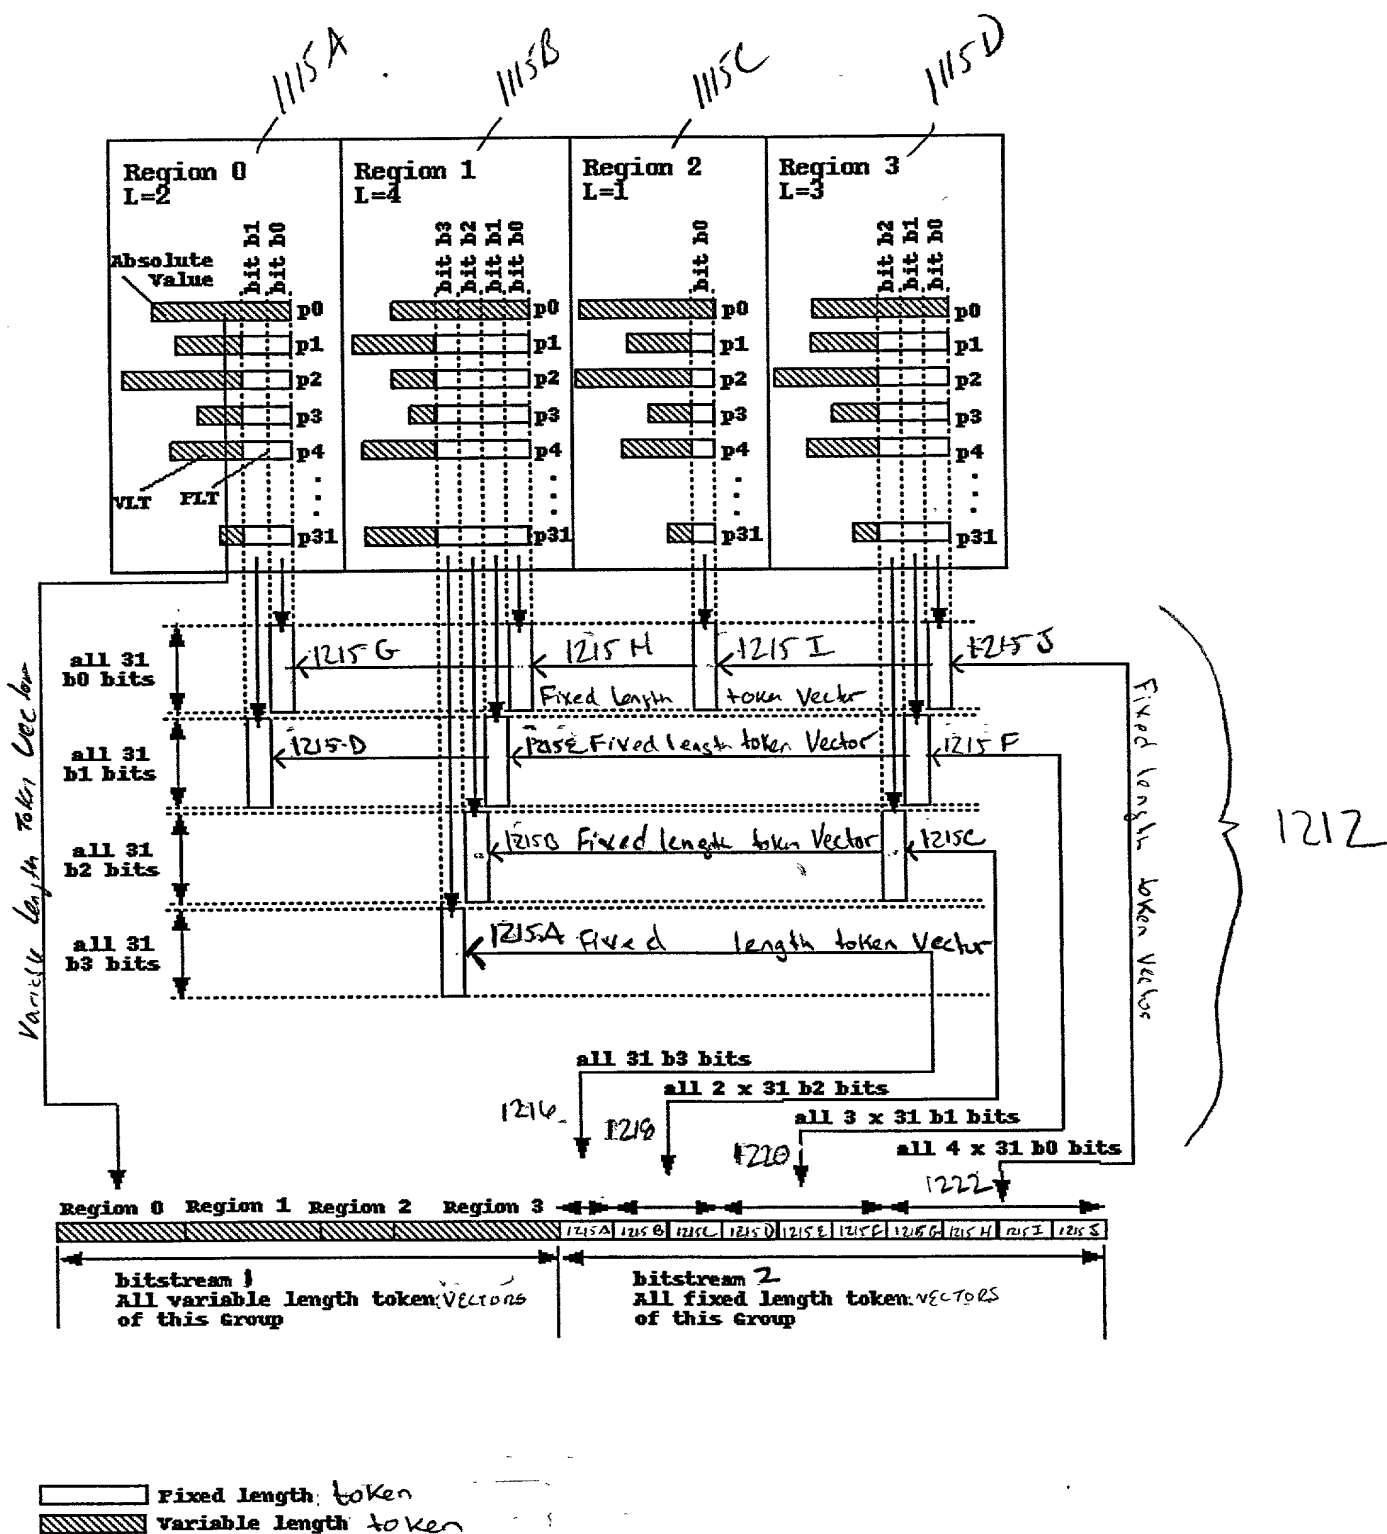


FIG. 12

Declaration for Patent Application

Docket Number: 15-4-1062.00

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled System and Method for Storing Compressed Data Onto a Storage Medium, the specification of which is attached hereto unless the following box is checked:

- ☐ was filed on _____;
as United States Application Number or PCT International Application Number _____; and
was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application, which designated at least one country other than the United States listed below, and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority	Claimed
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Application No.)	(Country)	(Day/Month/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Application No.)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____	_____
(Application No.)	(Filing Date)
_____	_____
(Application No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or under § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information that is material to patentability as defined in 37 C.F.R. § 1.56 that became available between the filing date of the prior application and the national or PCT international filing date of this application.

_____	_____	_____
(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)

Appl. No. To be assigned
Docket No. 15-4-1062.00

Send Correspondence to:

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.
1100 New York Avenue, N.W.
Suite 600
Washington, D.C. 20005-3934

Direct Telephone Calls to:

(202) 371-2600

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Fabian W. Meier
Signature of sole or first inventor <i>F. Meier</i> Date 7/25/2000
Residence San Francisco, CA
Citizenship Switzerland
Post Office Address 764 Cole Street, Apt. 6, San Francisco, CA 94117
Full name of second inventor Francis S. Bernard
Signature of second inventor Date
Residence Fremont, CA
Citizenship U.S.A.
Post Office Address 5528 Andromeda Circle, Fremont, CA 94538
Full name of third inventor
Signature of third inventor Date
Residence
Citizenship
Post Office Address

Declaration for Patent Application

Docket Number: 15-4-1062.00

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter that is claimed and for which a patent is sought on the invention entitled System and Method for Storing Compressed Data Onto a Storage Medium, the specification of which is attached hereto unless the following box is checked:

- ☐ was filed on _____;
as United States Application Number or PCT International Application Number _____; and
was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application, which designated at least one country other than the United States listed below, and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Application No.)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
(Application No.)	(Country)	(Day/Month/Year Filed)	

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____	_____
(Application No.)	(Filing Date)
_____	_____
(Application No.)	(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or under § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information that is material to patentability as defined in 37 C.F.R. § 1.56 that became available between the filing date of the prior application and the national or PCT international filing date of this application.

_____	_____	_____
(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application No.)	(Filing Date)	(Status - patented, pending, abandoned)

Send Correspondence to:

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.
1100 New York Avenue, N.W.
Suite 600
Washington, D.C. 20005-3934

Direct Telephone Calls to:

(202) 371-2600

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Fabian W. Meier	
Signature of sole or first inventor	Date
Residence San Francisco, CA	
Citizenship Switzerland	
Post Office Address 764 Cole Street, Apt. 6, San Francisco, CA 94117	
Full name of second inventor Francis S. Bernard	
Signature of second inventor <i>Francis S. Bernard</i>	Date 7/26/00
Residence Fremont, CA	
Citizenship U.S.A	
Post Office Address 5528 Andromeda Circle, Fremont, CA 94538	
Full name of third inventor	
Signature of third inventor	Date
Residence	
Citizenship	
Post Office Address	